


| | | | | | |
|------|----------|-------|-------|------|------|
| MARK | REVISION | CHAR. | APPD. | DATE | REV. |
| | | | | | |

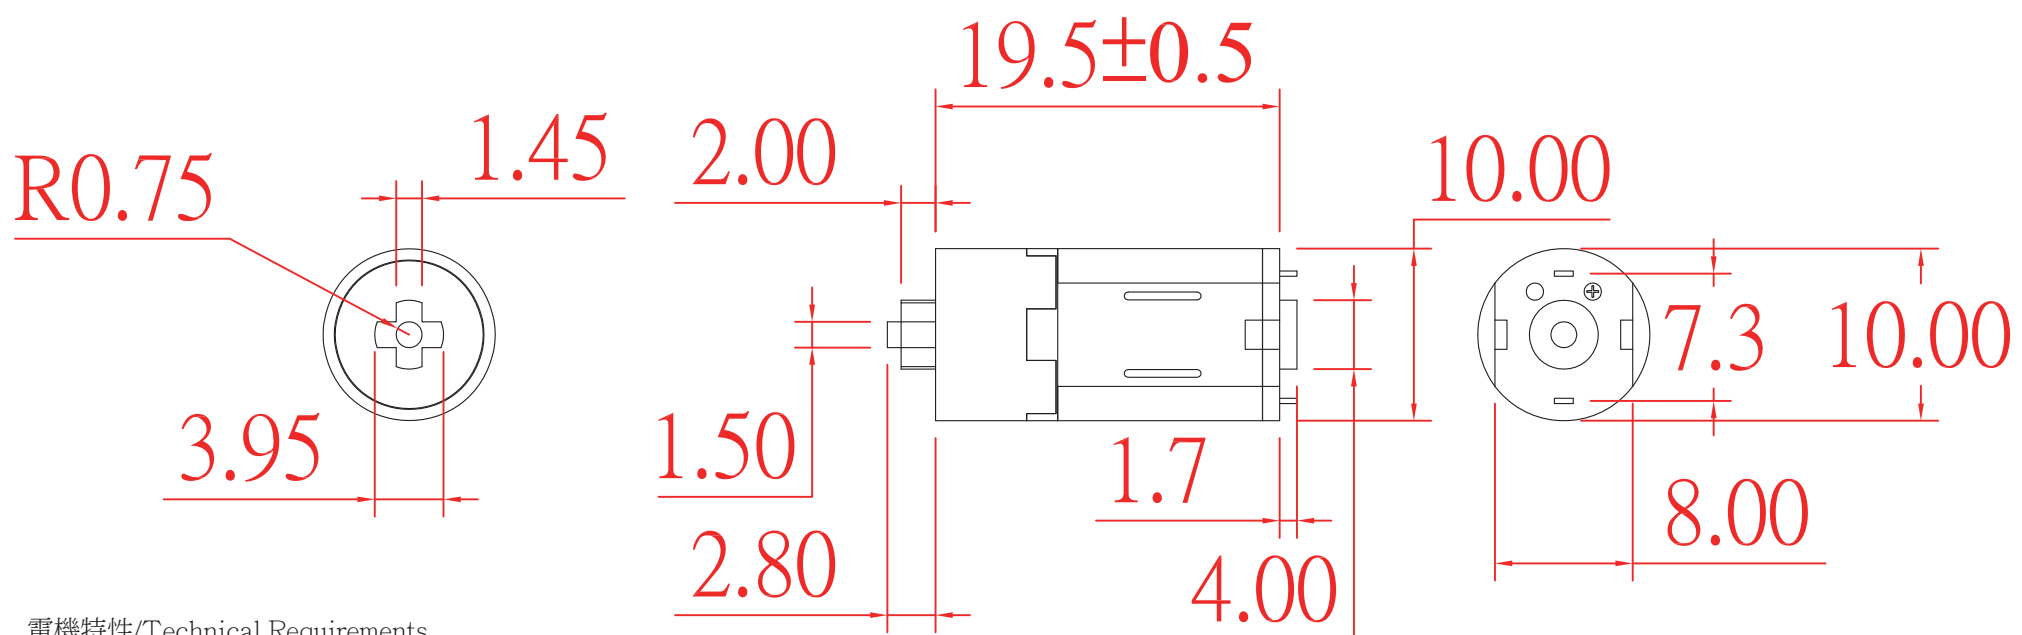

電機特性/Technical Requirements
 額定電壓/Rated voltage: 3.0V
 額定電流/Rated current: 100mA ±10%
 額定轉速/Rated speed: 110 ±12rpm
 堵轉電流/Stall current: 650mA Max
 端子阻抗/Terminal resistance: 1.0MΩ
 未註線性公差為/Unmarked tolerance: ±0.2mm

| | | | | | | | | | |
|------------|-------|-------|------|------|--|----------------------------|-------------|----------------|----------------|
| Tolerances | | | | | Excellent Competent Smart Pro 翰德凱電子有限公司 | | | | |
| Angel | ±1/2° | ±1° | ±1° | ±1° | Title 品名 | 10mm Micro DC Geared Motor | | | |
| 0-10 | ±0.05 | ±0.1 | ±0.2 | ±0.3 | Part No. 料號 | EMO-S1011000135-B | | Material 材料 | |
| 10-50 | ±0.1 | ±0.15 | ±0.3 | ±0.4 | Drawn by 製圖 | Ken Cheng | Date 日期 | Jul-31-17 | Finish 表面處理 |
| 50-150 | ±0.2 | ±0.25 | ±0.4 | ±0.5 | Checked by 審圖 | Sam Huang | Date 日期 | Jul-31-17 | Rev. 版本 |
| 150-500 | ±0.3 | ±0.4 | ±0.8 | ±1 | Size 圖紙大小 | A4 | Unit 單位 | mm | |
| >500 | ±0.5 | ±0.8 | ±1 | ±1.2 | Sheet 頁次 | 1 / 1 | Scale 比例 | 1.000 | |